


8" ALUTANK SERIES WITH 1" DN VALVES

ALUMINIUM HEADER TANKS
WITH GLOBAL IMMERSION

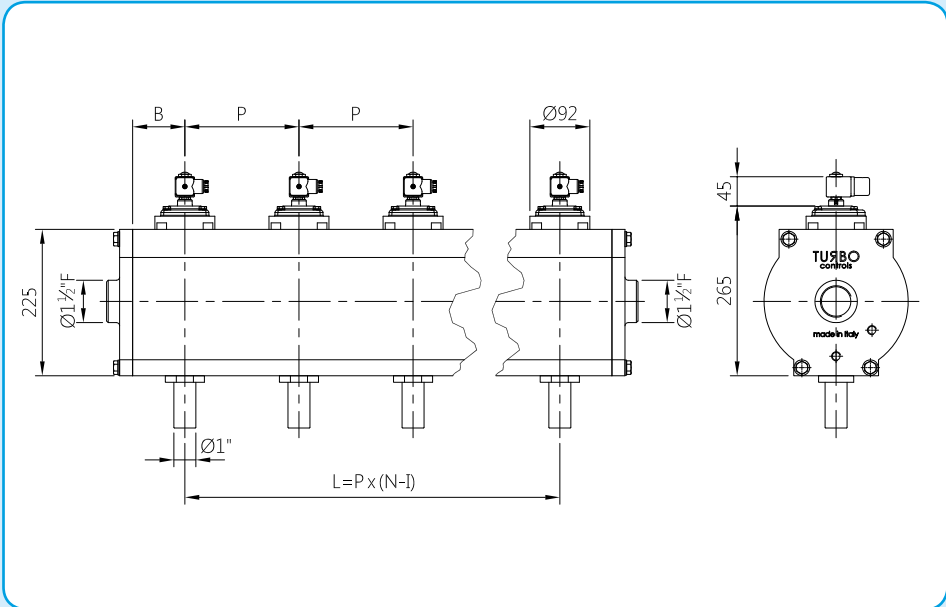

TECHNICAL FEATURES

- Tank body
Extruded anodised aluminium

- Ends
Die-cast aluminium

- Air cannons
Galvanised steel

- O-Ring
NBR

- Operating temperature
-20°C +80°C

- Operating pressure
0.5 ÷ 6 bar - 0.5 ÷ 8 bar

- Low temperature version
- 40°C +80°C

- (Aluminium air cannons)


Please contact our technical department for P min and B min values

DESCRIPTION



TS025(N-V-T)P / TS025(N-V-T)M

| | | |
|----|-------------------|---|
| 1 | Coil - Connector | BH10 V## / V## |
| 2 | Screws - Washers | TKITVTE06X20X4 |
| 3 | Pilot unit | 1331080 |
| 4 | Pilot cover | 1251750 |
| 5 | Remote cover | 1251770 |
| 6a | Diaphragm spring | 3241002 |
| 6 | Diaphragm (N-V-T) | TKISM025N Neoprene TKISM025V Viton TKISM0250T Low temperature |
| 7 | Screws - Washers | TKITVTE06X16X4 |
| 8 | Valve body | 1251300 |
| 9 | O-R gasket | 3301285 |

V## / V## = 24 Vdc - 24 Vac - 115 Vac - 230 Vac

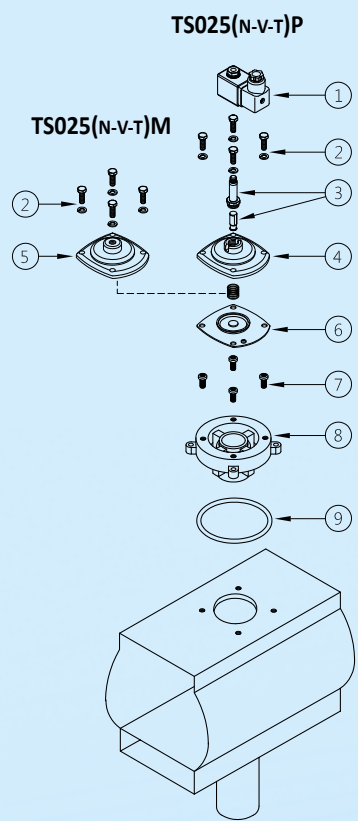

BOTTOM DIMENSIONS

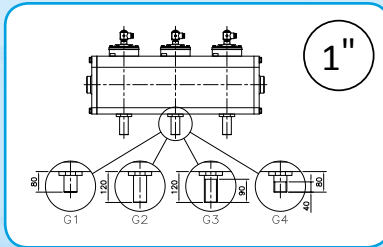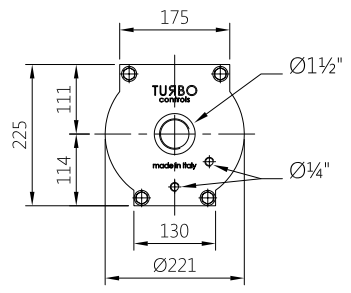

SHORT PLAIN OUTLET PIPE = G1
LONG PLAIN OUTLET PIPE = G2
LONG THREADED OUTLET PIPE = G3
SHORT THREADED OUTLET PIPE = G4

