


## 8" ALUTANK SERIES WITH 1½" DN VALVES

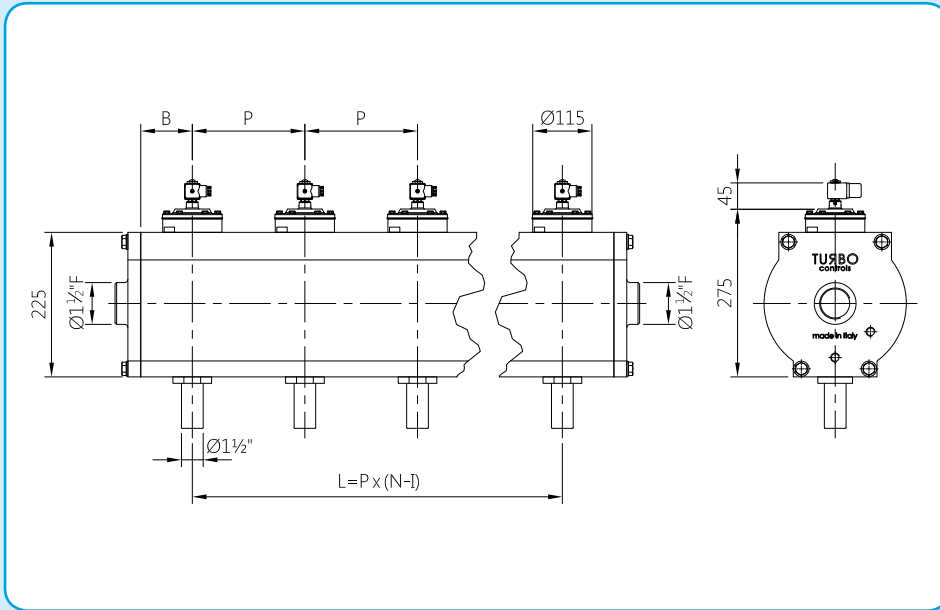

Please contact our technical department for P min and B min values

### TECHNICAL FEATURES

Tank body  
Extruded anodised aluminium

Ends  
Die-cast aluminium

Air cannons  
Galvanised steel

O-Ring  
NBR

Operating temperature  
-20°C +80°C

Operating pressure  
0.5 ÷ 6 bar - 0.5 ÷ 8 bar

Low temperature version  
- 40°C +80°C

(Aluminium air cannons)



### DESCRIPTION

### TS030(N-V-T)P / TS030(N-V-T)M

1	Coil - Connector	BH10 V## / V##
2	Screws - Washers	TKITVTE06X20X6
3	Pilot unit	1331080
4	Pilot cover	1251802
5	Remote cover	1251805
6	Diaphragm spring	3241018
7	Diaphragm (N-V-T)	TKISM030N Neoprene TKISM030V Viton TKISM030T Low temperature
8	Screws - Washers	TKITVTE06X20X2
9	Valve body	1251370
10	O-R gasket	3301276

V## / V## = 24 Vdc - 24 Vac - 115 Vac - 230 Vac

### BOTTOM DIMENSIONS

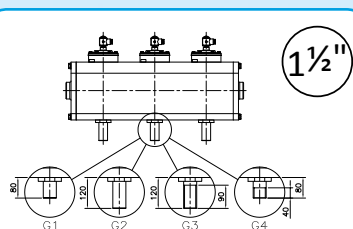

SHORT PLAIN OUTLET PIPE = G1  
LONG PLAIN OUTLET PIPE = G2  
LONG THREADED OUTLET PIPE = G3  
SHORT THREADED OUTLET PIPE = G4

### TS030(N-V-T)P

