

REMOTE PILOT FOR DIAPHRAGM VALVES- ESRM SERIES

LONG-DISTANCE ACTIVATION



| FEATURES | |
|-----------------------|-----------------------------|
| Fluids | Non-lubricated filtered air |
| Operating pressure | between 0.5 and 7.5 bar |
| Operating temperature | -20°C; +80°C |
| Body | Brass |
| Pilot core | Stainless steel |
| Coil insulation | Class H |
| Connector | PG9 / IP 65 |
| Standard voltage | 24VDC (12W) |

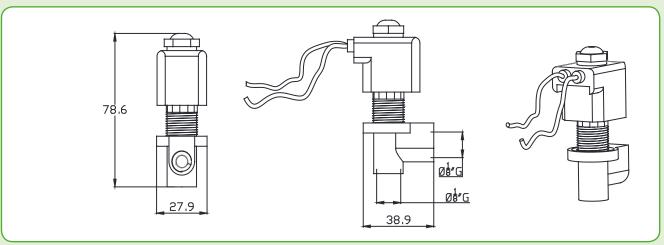

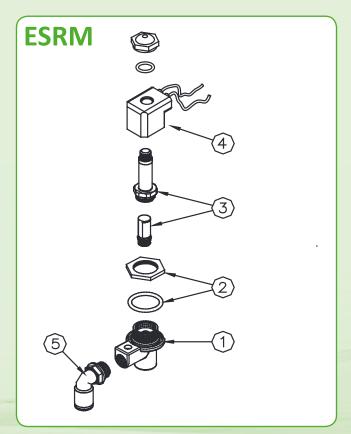

| | DES | CRIPTION | ESRM |
|---|-----|--|-------------------|
| ı | 1 | Pilot body | PCRP |
| | 2 | Second lock nut + O-ring | 3121604 - 3301224 |
| Ī | 3 | Pilot unit | 1331088 |
| | 4 | Coil | 4121048 |
| | 5 | Quick connection elbow for 6x4 rislan pipe | 3421002 |
| | | | |